

FORM PTO-1390
(REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

33897

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/936828

INTERNATIONAL APPLICATION NO.

PCT/SE00/00527

INTERNATIONAL FILING DATE

17 March 2000 (17.03.00)

PRIORITY DATE CLAIMED

19 March 1999 (19.03.99)

TITLE OF INVENTION

APPARATUS FOR CLEANING TEXTILES WITH A DENSIFIED LIQUID TREATMENT GAS

APPLICANT(S) FOR DO/EO/US

UHLIN, Goran

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

"EXPRESS MAIL" MAILING LABEL CERTIFICATE

Re: U.S. PCT-based Patent Application for
"APPARATUS FOR CLEANING TEXTILES WITH A DENSIFIED LIQUID
TREATMENT GAS"
International Application No.: PCT/SE00/00527
International Filing Date: March 17, 2000
Attorney's Docket No.: 33897

09536828 091801


"Express Mail" mailing label number EL609748106US

Date of Deposit September 18, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

Janet Morrison

Printed Name of Person Mailing Paper or Fee



Signature of Person Mailing Paper or Fee

PATENTIN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Goran Uhlin
Serial No.: N/A
Filed: Herewith
Title: "APPARATUS FOR CLEANING TEXTILES WITH A
DENSIFIED LIQUID TREATMENT GAS"
Docket No.: 33897

PRELIMINARY AMENDMENT "A"

Box PCT
Commissioner for Patents
Washington, D.C. 20231

Sir/Madam:

Please amend the above-identified application, prior to examination thereof, in the following manner.

IN THE SPECIFICATION:

Page 1, line 10, insert --This application claims the benefit of


International Application Number PCT/SE00-00527, which was
published in English on September 28, 2000.--

REMARKS

If there are any additional fees resulting from this communication not covered by the enclosed check, or if the check was omitted, please charge all uncovered fees to our Deposit Account No. 16-0820, our Order No. 33897.

Respectfully submitted,

PEARNE & GORDON, LLP

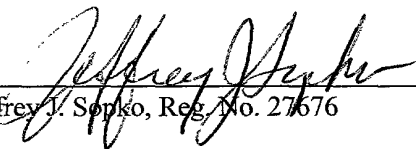By 
Jeffrey J. Sopko, Reg. No. 27676

526 Superior Avenue East
Suite 1200
Cleveland, Ohio 44114-1484
(216) 579-1700

September 18, 2001

093688-091801
"0820" 0229560

2/pols

APPARATUS FOR CLEANING TEXTILES WITH A DENSIFIED LIQUID TREATMENT GAS

10

The present invention concerns an apparatus for cleaning textile objects using a densified, liquid treatment gas, which preferably is constituted by carbon dioxide.

By washing textile objects one has traditionally had the possibility to choose to treat these in a detergent solution based on water, or to utilize a dry cleaning method, where water is replaced by trichlorethene or perchlorethene. By what is known as common wash, which can be used for most articles of clothing, these are placed in a treatment drum of a washing machine to be cleaned in a detergent solution based on water. For garments not standing water-wash, those are instead placed in a dry-cleaning machine and are cleaned in a wash-solution based on solvents, usually containing perchlorethene. Those solutions based on solvents has, from an environmental standpoint, been found to be inappropriate, and hence one has tried to find replacement liquids, which from a washing viewpoint are equally good as wash-solutions based on solvents earlier used, but which at the same time do not demonstrate the drawbacks - from an environmental viewpoint - which are inherent in the wash-solutions based on solvents.

Such a replacement liquid having suitable properties for cleaning of textiles is carbon dioxide in liquid or supercritical state. The patent specification US-A-5,267,455 describes a system for chemically cleaning textiles using carbon dioxide in liquid or supercritical state. This system include a treatment chamber, a supply tank for liquid carbon dioxide and likewise a vaporization chamber for liquid carbon dioxide, which has been used in the process and shall after purification be brought back to the supply tank. The liquid carbon dioxide is pumped from the supply tank to the treatment chamber, and when the cleaning process has been completed, from the treatment chamber to the vaporization

chamber. The vaporization of the liquid carbon dioxide takes place by heating, and the evaporated gas is conveyed through filters and a condensing apparatus back to the supply tank. The described process depicts how the chemical cleaning using liquid carbon dioxide should possibly come about, but is by no way optimized with respect to recovering from treatment and vaporization chambers liquid and gaseous carbon dioxide respectively. Because of the existing pressure conditions in the supply tank and in the vaporization chamber one cannot completely empty the vaporization chamber of gas, without specific measures. The solution will be to evacuate surplus gas to the ambient air, which entails that this gas must be replaced from a gas supplier, and that to a cost which is not negligible.

The publication WO 99/13 148 describes a device for cleaning of garments in liquid carbon dioxide. Like at the apparatus of US patent 5,267,455 this document describes a device comprising a treatment chamber, a supply tank and a vaporization chamber, which are mutually connected to each other by way of suitable tubes and valve means. Further, the device comprises compressor means, which is used partly, most important, to completely empty the treatment chamber of carbon dioxide, partly to serve as driving means for carbon dioxide gas, which during one in treatment process included vaporization process from the vaporizer via condenser means shall be brought back to the supply tank. To evaporate liquid carbon dioxide in the vaporizer there are arranged particular heating means, and further, the condensing of carbon dioxide gas, which via the compressor means is directed to the condensation means, takes place without taking care of the energy thereby released.

Thus one object of the present invention is to improve the device for cleaning textiles mentioned as known, as far as possible all in the system circulating carbon dioxide being taken care of, and after cleansing being brought back to the supply tank. Another object is to take care of the energy released during the process, and utilize this in process steps, where otherwise energy provided from outside has to be utilized.

The stated objects will be obtained by a device for cleaning textiles with densified, liquid state treatment gas, which are given the characteristics stated in claim 1. Preferred embodiments are included in adherent sub-claims.

The invention will here be described in detail with reference to embodiments shown

on the drawing, in which figure 1, schematically, shows a first embodiment of a device according to the invention intended for cleaning textiles in a washing fluid consisting of liquid carbon dioxide, and figure 2 shows a modified embodiment of the device according to figure 1.

5 With reference to figure 1 the device comprises, expressed in common language, a washing machine, a treatment chamber 10, in which the textiles to be cleaned are introduced. The treatment chamber 10 is of heavy duty accomplishment to be able to resist the high pressures, which are required to keep the carbon dioxide in fluid state at a temperature in the main corresponding to room temperature. A door 12 is arranged to
10 seal the chamber 10, and also this is in the same solid accomplishment. Suitable locking means, not shown, are arranged in order to keep the door 12 in a locked position during the cleaning operation in the treatment chamber 10.

To get the cleaning of the textiles in the treatment chamber as effective as possible, an agitation of those is desired, and for that object the textiles are supported interior of
15 a revolving washing drum 14 inside the treatment chamber 10. In prevalent way the drum may be equipped with carry-over bulges, not shown, intended to lift the textiles from the bottom of the drum during its revolving, and again release these as they have reached the upper part of the drum. In this way different parts of the textiles are brought in contact with the liquid carbon dioxide in a more uniform way. The revolving driving
20 of the drum can be brought about with the aid of an electric motor 16, by way of a suitable transmission, for example in the way described in the patent US-A-5,267,455.

For supply of the liquid carbon dioxide there is arranged a supply tank 18, the lower part of which is through tubes 20, 22 and valve 24 connected with the lower part of the treatment chamber 10. The upper part of the supply tank 18 is through tubes 26, 28, 30
25 and 32 along with valves 29, 33, 34 connected with the upper part of the treatment chamber 10.

For recycling of the carbon dioxide used in the cleaning process, there is arranged a evaporator chamber 36, which trough tubes 38, 40 with intermediate valve 42 is connected to the treatment chamber 10 at its lowermost part. For vaporization of the
30 liquid carbon dioxide, which is conveyed from the treatment chamber 10 through the tubes 38, 40 and the valve 42 to the evaporator chamber 36, a heat exchanger in form of

a condenser 44 is used.

A compressor 46 is a vital component in the washing machine according to the invention, and this compressor is driven by an electric motor 48. The compressor is used in substance to completely empty the treatment chamber 10 and the evaporator chamber 36 after finished cleaning and evaporation process respectively. The pressure side of the compressor 46 is connected to an inlet to the heat exchanger 44 through tubes 50, 52 and an intermediate valve 54, and the outlet of the lower most part of the exchanger 44 is connected to the supply tank 18 through tubes 56, 58 and 60, an additional heat exchanger 62 and a valve 64. The low side of the compressor is connected to the tube 28 through a tube 66.

A valve 69 is arranged to evacuate air from the treatment chamber 10 before this will be filled with carbon dioxide. To compensate carbon dioxide lost during a preceding treatment phase, a further valve 68 is arranged to permit filling of the treatment chamber with new carbon dioxide, before a new treatment phase is begun. Carbon dioxide can, for instance, be partly left in the garment articles of clothing, and partly be evacuated to the ambient air.

The action of the washing machine shown in figure 1 will here be described. Upon introduction of articles of clothing in the washing drum 14 in the treatment chamber 10 of the machine, the door 12 will be closed and locked in a non specified manner. After this moment the treatment chamber will be evacuated of air, which takes place through the opening of the valve 69 and a pump 67 is actuated and works until the pressure ≤ 0.5 bar. When a pressure sensor 70 has detected this pressure in the treatment chamber 10, the valve 69 is closed and the pump 67 stopped. The next step is represented by a pre-pressurization of the treatment chamber 10, i.e. a connecting path is established from the supply tank 18 to the treatment chamber 10 in such a way that the pressure in the treatment chamber 10 attain a level of approximately 10 bar. The connection path is formed by the tube 26, the valves 29 and 33, the tube 30, the valve 34 and a tube 32. When in the treatment chamber 10 the new pressure level has been attained, the valve 34 is closed and a valve 68 is opened for feeding new carbon dioxide to the treatment chamber 10 from an external supply, i.e. gas tube furnished by a gas deliverer. The duty of this additional carbon dioxide is to compensate for carbon dioxide, which was lost

during the previous treatment phase of the washing machine. For this purpose the valve 68 is held open during a suitable time, and will be closed thereupon.

After refilling of new carbon dioxide to the system, liquid carbon dioxide should be fed to the treatment chamber 10 from the supply tank 18. This phase starts with pressure balancing between the gas-side of the supply tank 18, i.e. the uppermost part of the supply tank, and the treatment chamber 10, and for this purpose the valve 34 will be opened. The valves 29 and 33 are already open. When the pressures in the treatment chamber 10 and in the supply tank 18 are equalized, the valve 24 will be opened and liquid carbon dioxide flows through the tube 20, the valve 24 and the tube 22 into the treatment chamber 10 up to a predetermined level. The amount of transferred carbon dioxide can easily be determined through measuring the lowering in level in the supply tank 18. By placing the supply tank 18 on a higher level than the treatment chamber 10, the transfer of liquid carbon dioxide from the supply tank to the treatment chamber can take place due to influence of gravitation so as to a pump can be dispensed with.

When the filling of the treatment chamber has been completed, all valves are closed and the cleaning process in the treatment chamber can commence. This process proceeds during roughly 10 minutes and implies shortly that the drum 14 with its load of garments rotates in the liquid carbon dioxide, and during the rotation it treats and perform a stirring of the articles of clothing, as to give the washing liquor, the liquid carbon dioxide, good exposure to all parts of the garments.

When the cleaning process has been finished the washing liquor in the treatment chamber 10 shall be removed and the pressure therein lowered to atmospheric pressure, so that the door 12 can be opened and the clean garments can be removed from the treatment chamber. The liquid carbon dioxide in the treatment chamber 10 will be taken care of in such a way that it is conveyed to the evaporator chamber 36 to be vaporized and from there via a condenser or heat exchanger 44 be brought back to the supply tank 18. As in this stage the pressure differs very much between the evaporator chamber 36, the supply tank 18 and the treatment chamber 10 one should increase the pressure in the evaporator chamber 36 step by step through pressure balancing, first with the supply tank 18, and thereupon with the treatment chamber 10, which in this stage has the highest pressure, and from where also the liquid carbon dioxide shall be conveyed to the

evaporator chamber 36. In a first step a connection is established between the supply tank 18 and the evaporator chamber via the tube 26, the valves 29 and 33, the tube 30, another tube 31, a valve 27 and a tube 35 in order to increase the pressure in the evaporator chamber 36 to about the same level as that existing in the supply tank 18.

5 Subsequently the valves 29 and 33 are closed.

In a second step pressure balancing shall take place between the treatment chamber 10 and the evaporator chamber 36, and for this purpose the valve 34 will be opened to establish a connection between the treatment chamber 10 and the evaporator chamber 36 through the tube 32, the valve 34, the tube 31, the valve 27 and the tube 35. When
10 the pressures are equal in the treatment chamber 10 and the evaporator chamber 36 a valve 42 is opened so that a connection is opened between the lower part of the treatment chamber 10 and the evaporator chamber 36 via the tube 38, the valve 42 and the tube 40. The valve 42 is kept open as long as required for all free liquid carbon dioxide in the treatment chamber 10 to leave for the evaporator chamber 36. Depending
15 on that the treatment chamber 10 is located above the evaporator chamber 36, the transfer of liquid carbon dioxide from the treatment chamber to the evaporator chamber can take place by means of gravitation, and an otherwise necessary pump can be dispensed with.

The evaporator chamber 36 now contains dirt-mingled washing liquid and liquid
20 carbon dioxide from the treatment chamber 10, and in its upper part gaseous carbon dioxide. To separate the dirt from the liquid carbon dioxide a process of distillation will follow, where gaseous carbon dioxide with aid of the compressor 46 will be sucked from the evaporator chamber 36 and through the condenser or heat exchanger 44 is conveyed to the supply tank 18, which the carbon dioxide again reaches in liquid state. Now the
25 valve 42 being closed and the valves 33 and 54 are opened, while the valve 64 and a valve 65 are activated to regulate the pressure in the tube upstream the valves and compensate for the pressure in the compressor 46 and in the supply tank 18. The compressor 46 is started and is allowed to run until the pressure in the evaporator chamber tends to decrease. The compressor sucks gaseous carbon dioxide from the
30 evaporator chamber 36 through the tube 35, the valve 27, the tube 31, the tube 30, the valve 33 and the tube 66 and gives off gaseous carbon dioxide at enhanced pressure and

heat content through the tube 50, the valve 54, the tube 52 to the heat exchanger 44, where heat is emitted to the evaporator chamber 36 under condensation of the gaseous carbon dioxide. In this phase the gas is essentially condensed and can be conveyed through the tube 56 to a further heat exchanger 62, the task of which is to completely
5 condense the remaining gaseous carbon dioxide in order to convey only liquid carbon dioxide via the tube 58, the valves 64 and 65 and the tube 60 back to the supply tank 18.

When the process of distillation has been finished preparations for opening the door 12 and taking out of the clean articles of clothing follow on. For this purpose first the pressure in the treatment chamber 10 has to be decreased and should assume the value
10 1.5 bar. Thus the valve 33 will be closed while valve 55 is opened and the compressor 46 is started and can work until the pressure in the treatment chamber 10 has assumed the desired value of 1.5 bar. To make it possible to open the door 12, the pressure in the treatment chamber must be decreased further to the value 0 bar, and for this purpose a so called free-blowing takes place, which is brought about by opening a valve 39, and via
15 a filtering device 41 the remaining gaseous carbon dioxide is conveyed to the ambient air.

Before the door is opened the distillate is taken charge of, i.e. the dirt segregated in the evaporator chamber 36. This is called dirt-blowing and implies that a valve 43 is rapidly opened and closed to press out the distillate and at the same time minimize the amount of gaseous carbon dioxide accompanying the distillate. After this instant of
20 operation the cleaning process is completed, and the door 12 can be opened for taking out the clean articles of clothing.

On the eve of a following new washing process probably the balance in the supply tank 18 can need adjustments in respect of temperature and pressure. For this purpose the valves 55, 64 and 65 are opened and the compressor 46 will be started and allowed
25 to run until the pressure in the supply tank 18 assumes a suitable value, in the example 57 bar. If required, also the heat exchanger 62 is activated. Afterwards all valves are closed and the compressor 46 will be stopped.

For control of the function of the washing machine there is arranged preferable a computerized guide system, which receives information on pressure and temperature
30 states in the treatment chamber 10, the supply tank 18 and likewise in the evaporator chamber 36 from suitable temperature and pressure sensors therein. Moreover, it is of

value to be able to measure the level of liquid carbon dioxide in the supply tank 18 and in the treatment chamber 10, and to this end suitable level gauges can be arranged. The different sensors for pressure, temperature and level are schematically shown on the drawing, but are not described in details since they are of conventional designs, and have
5 no specific significance in connection with the invention. The same is valid for the chosen computerized control system, which in the same way can be of any conventional kind.

As evident from the above given description of a preferred embodiment of the invention, the gaseous carbon dioxide in the described washing machine is taken care of
10 practically completely. Due to connections between those parts of the different in the machine arranged containers holding vapour phase carbon dioxide a necessary pressure balancing takes place between the containers in relation to pressurizing of the treatment chamber 10 and the evaporator chamber 36 before transferring liquid carbon dioxide from the supply tank 18 to the treatment chamber 10 and from the treatment chamber 10
15 to the evaporator chamber 36 respectively. In relation to the destillation of gaseous carbon dioxide from the evaporator chamber 36, condensing takes place in the condenser or heat exchanger 44 of gaseous carbon dioxide released from the compressor 46 under raised pressure and increased heat content, and the heat given off at that occasion is utilized to vaporize the liquid carbon dioxide in the evaporator chamber 36. Thus, in this
20 way one can dispense with specific heating arrangements for the evaporation process.

In the embodiment shown in figure 1 a separate vaporizer is arranged. To further simplify the washing machine, in a modified embodiment as shown in figure 2 the evaporator chamber 36 is excluded, and the vaporization of liquid carbon dioxide takes place directly from the treatment chamber 10. In the schematically shown example of
25 figure 2 the vaporizer has been depicted as a box designated 80 and located beneath the treatment chamber 10, and containing a heat exchanger 82 of a kind similar to the heat exchanger 44 in figure 1.

The function of the device shown in figure 2 is essentially the same as the one by the device according to figure 1. Owing to that the vaporization in this embodiment takes
30 place directly from the treatment chamber 10 in stead of from a separate evaporator 36, the process steps in the embodiment according to figure 1, which goes with the transfer

of liquid carbon dioxide from the treatment chamber to the evaporator chamber, as well as some of the necessary pressure balancing moments between the evaporator chamber, the treatment chamber and the supply tank can be dispensed with.

During the condensing progress the task in both embodiments according to figure 1 and figure 2 is to empty the treatment chamber of liquid carbon dioxide, and at the same time clean this working fluid from impurities having been released from textiles processed in the treatment chamber. In the washing machine according to figure 2 the evaporation process, which follow on as the treatment phase has been concluded, in brevity takes place in the following manner.

10 The valves 33, 54 and 64 are opened and the compressor started so that gaseous carbon dioxide is sucked from the treatment chamber 10 through the tubes 32 and 30, the valve 33 and the tube 66. The compressor 46 delivers on its compression face gaseous carbon dioxide with raised pressure and increased temperature, and gas is conveyed through the tube 50, the valve 54 and the tube 52 to the heat exchanger 82, 15 where it gives off its heat and, essentially in liquid state, is conveyed further on via the tube 56 to the heat exchanger 62, where possibly remaining gaseous carbon dioxide is transferred to liquid state. The liquid carbon dioxide is after that conveyed through the tube 58, the valve 64 and the tube 60 back to the supply tank 18. Thanks to the evaporator chamber now constituting a part of the treatment chamber 10 and the heat 20 exchanger 82 to its function as a condenser for the gaseous carbon dioxide is arranged in direct connection to the treatment chamber and emits condensing heat to that, at the embodiment according to figure 2, an advantageous simplification of the washing machine is obtained. As in the embodiment of figure 1, by means of the action of the compressor 46, is obtained on the whole a complete taken charge of the working fluid, 25 i.e. carbon dioxide in liquid and gaseous state. Owing to that the heat released by condensing the carbon dioxide is brought back to the process, the amount of energy needed to be provided from outside is restricted, and specific heating devices for evaporation of liquid carbon dioxide can be dispensed with. This also entails that every treatment phase where textiles are cleaned in liquid carbon dioxide can be followed by 30 a destilling phase, so the liquid state carbon dioxide brought back to the supply tank is always clean. This is not the case in the above mentioned publication WO-99/13148,

where during the cleaning process the liquid carbon dioxide is circulated through filtering means and the supply chamber back to the treatment chamber, and is consequently not completely cleaned like at a distillation process. According to the invention the problem has found its solution by way of the heat energy available in the evaporator, which has
5 been changed up by a heat pump formed of the compressor means and the condenser means.


The invention is not restricted to the above described and in the drawing shown example of embodiment, but modifications and additions can be introduced within the concept of invention as defined in the following patent claims.

Claims

1. Device for cleaning of textile articles with a densified, liquid state treatment gas, comprising a treatment chamber (10), a supply tank (18) for densified treatment gas and an evaporator chamber (36), the spaces which are connected to each other by way of suitable tubes to permit pressure balance between the different spaces, filling of the treatment chamber (10) with liquid state treatment gas from the supply tank (18), as well as drainage of liquid state treatment gas from the treatment chamber (10) to the evaporator chamber, including compressor means (46) arranged, which are adapted partly to bring about essentially complete drainage of gaseous treatment gas from the treatment chamber (10), partly to constitute the driving means during one in the process included distillation phase where densified treatment gas in the evaporator chamber (36) is given gaseous state and via condenser means (44) is conveyed back to the supply tank (18), **characterized therein** that the condenser means (44) being in heat transmitting contact with the evaporator chamber (36), besides the compressor means are organized together with the condenser means to form a heat pump intended alone to furnish the heat energy requisite for evaporation of the liquid in the evaporator.
2. Device according to claim 1, **characterized therein** that in the tube connecting the evaporator chamber (36) to the supply tank (18) is arranged an additional heat exchanger (62).
3. Device according to claim 1 or 2, **characterized therein** that the supply tank (18) is arranged above the treatment chamber (10), which is arranged above the evaporator chamber (36) so that liquid state treatment gas due to gravitation can be conveyed from the supply tank (18) to the treatment chamber (10), respectively from the treatment chamber (10) to the evaporator chamber (36).
4. Device according to any of the preceding claims, **characterized therein** that the liquid state treatment gas is constituted by carbon dioxide.

5. Device according to claim 1, **characterized therein** that the treatment chamber (10) is adapted to also constitute evaporator chamber.
6. Device according to claim 5, **characterized therein** that the condensor means (80,82) are in heat transferring contact with the treatment chamber (10).
7. Device according to claim 6, **characterized therein** that the condensor means are constituted by a heat exchanger comprising a container (80), which is applied at the bottom of the treatment chamber (10), and the interior of which is in flow-connection to the interior of the treatment chamber, besides a tube (82) is passing through the container (80), and during a course of evaporation gaseous carbon dioxide is conveyed from the treatment chamber (10) via the compressor (46) to condensing.

0936229-091804

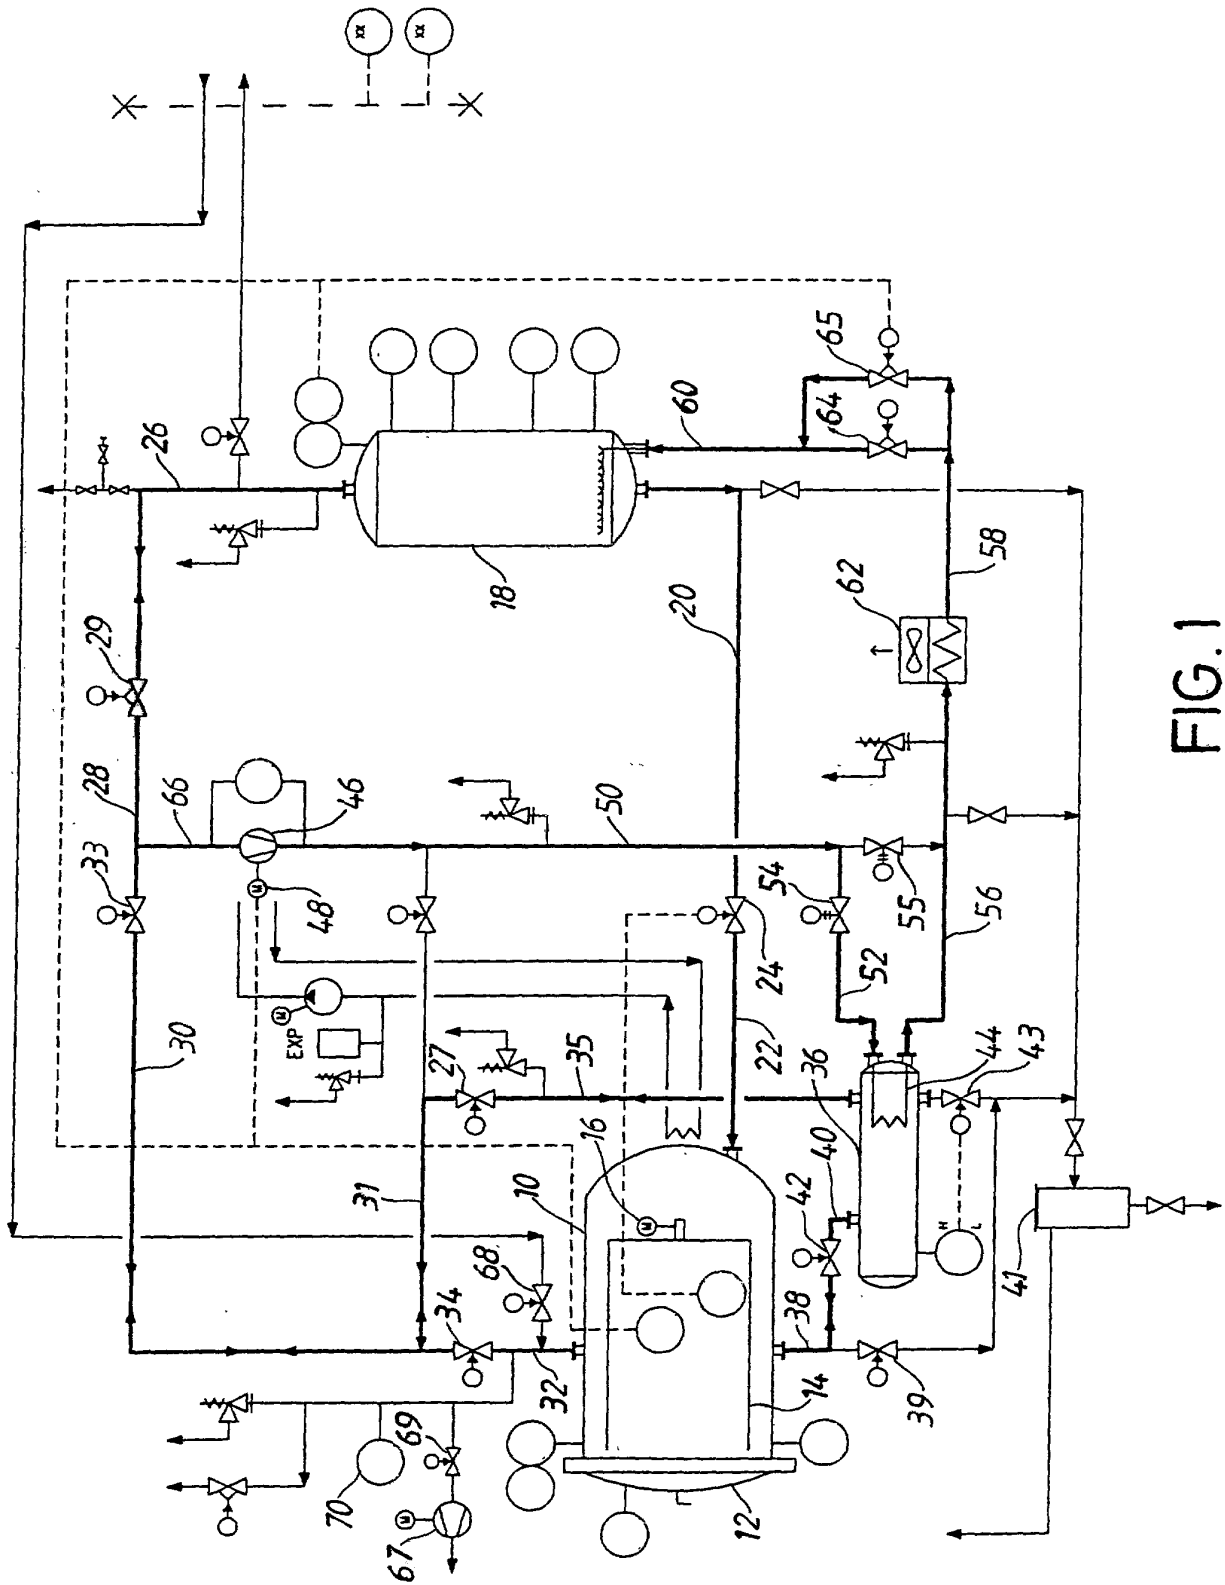

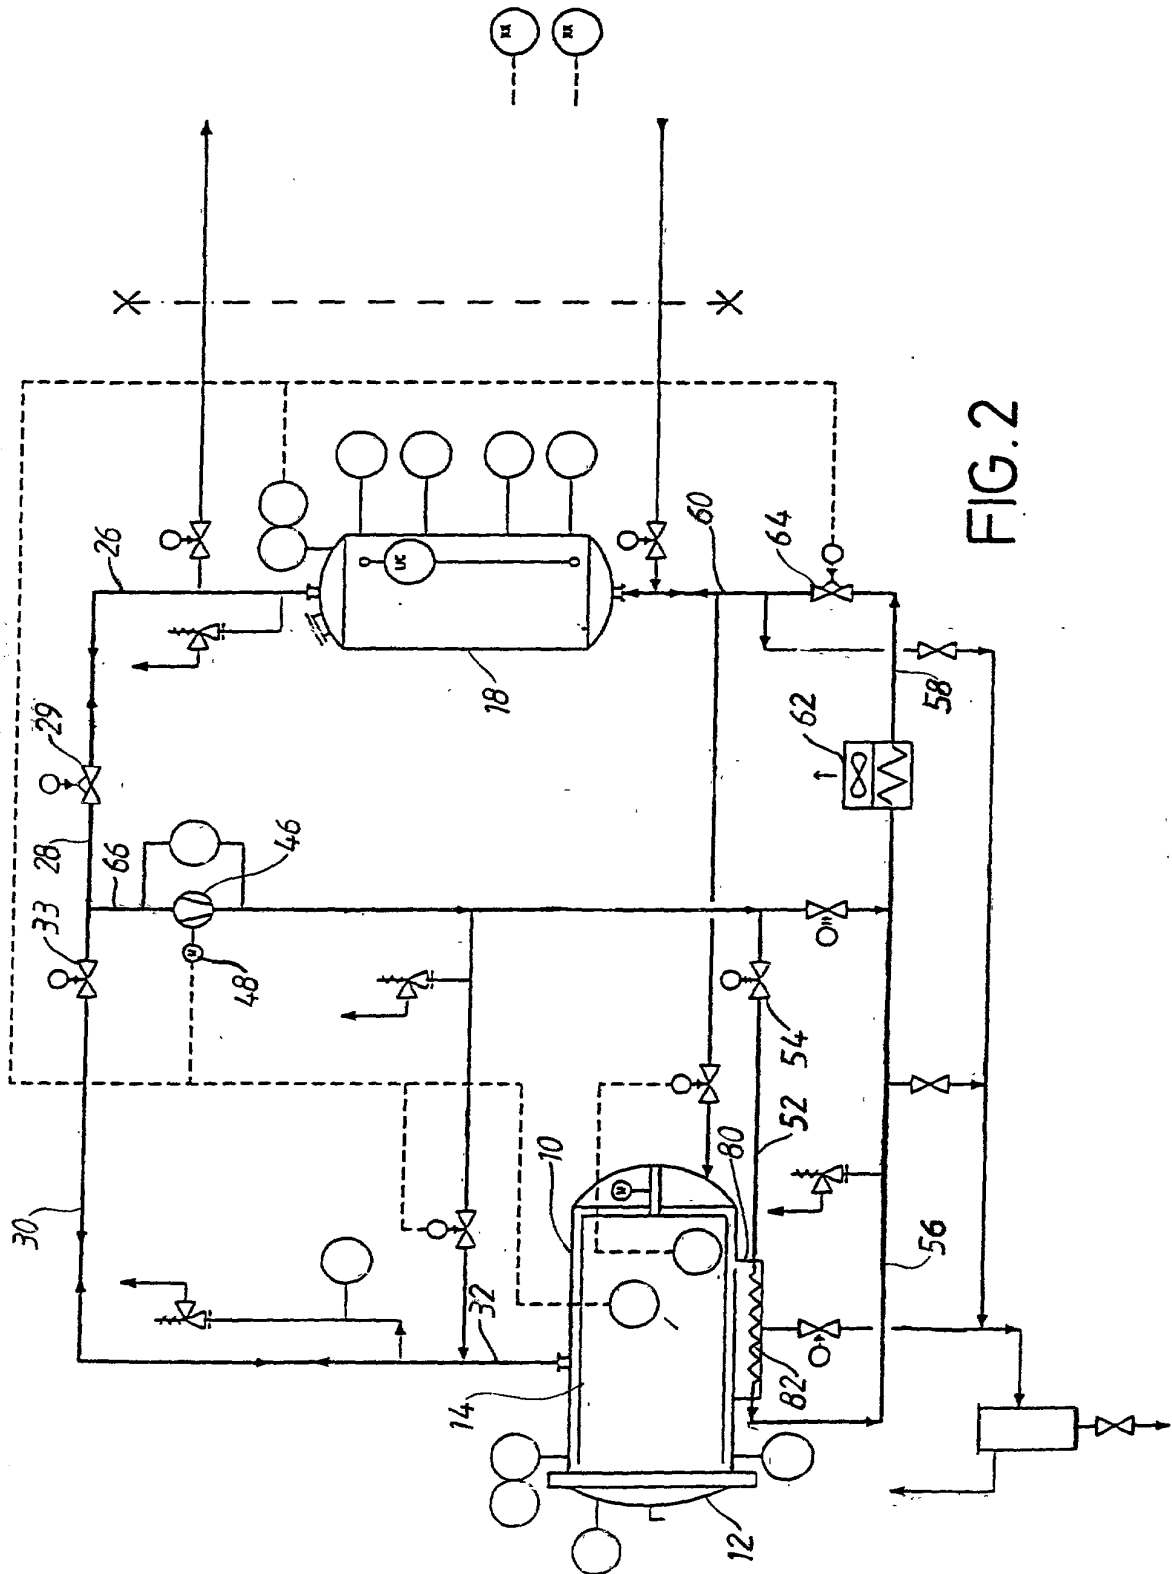


FIG. 2

DECLARATION AND POWER OF ATTORNEY FOR UTILITY OR DESIGN PATENT APPLICATION

☒ Submitted with Initial Filing

☐ Submitted after Initial Filing
(Surcharge (37 CFR 1.16(e)) required)

Attorney Docket No.: 33897

Application Number: _____

First Named Inventor: Göran UHLIN

Filing Date: _____

Group Art Unit: _____

Examiner Name: _____

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

APPARATUS FOR CLEANING TEXTILES WITH A DENSIFIED LIQUID TREATMENT GAS

the specification of which (check only one item below)

☒ is attached hereto,

OR

☐ was filed on (MM/DD/YYYY) ____ as United States Application Number or PCT International Application Number ____ and was amended on (MM/DD/YYYY) ____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

0935828-091901

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d), or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

<u>Country</u>	<u>Prior Foreign Application Number(s)</u>	<u>Foreign Filing Date (MM/DD/YYYY)</u>	<u>Priority Claimed?</u>
Sweden	9901002-7	19/03/1999	Yes

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

<u>Provisional Application Number(s)</u>	<u>Filing Date (MM/DD/YYYY)</u>
--	-------------------------------------

I hereby claim the benefit under 35 U.S.C. 120, of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>U.S. Parent Application or PCT Parent Number</u>	<u>Parent Filing Date (MM/DD/YYYY)</u>	<u>Parent Patent Number (if applicable)</u>
---	--	---

As a named inventor, I hereby appoint each of the following as my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Charles B. Gordon, Reg. No. 16923
William C. McCoy, Reg. No. 16885
Richard H. Dickinson, Jr., Reg. No. 18622
Thomas P. Schiller, Reg. No. 20677
David B. Deioma, Reg. No. 22841
Joseph J. Corso, Reg. No. 25845
Howard G. Shimola, Reg. No. 26232


Jeffrey J. Sopko, Reg. No. 27676
John P. Murtaugh, Reg. No. 34226
James M. Moore, Reg. No. 32923
David E. Spaw, Reg. No. 34732
Michael W. Garvey, Reg. No. 35878
Paul R. Katterle, Reg. No. 36563
Richard M. Mescher, Reg. No. 38242
M. David Galin, Reg. No. 41767

Address all correspondence to Customer Number 000,116.

Please direct all correspondence and inquiries to Jeffrey J. Sopko at (216) 579-1700.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) - ∞ Inventor Name (sole or joint): Göran Uhlin

Signature: 

Date: 2001-08-09

Citizenship: Swedish

Residence (City, State, Country): SE-340 14 Lagan SEX

Post Office Address: Möllaregatan 5

SE-340 14 LAGAN, SWEDEN

09936828-091804